

## BIRCH, STEWART, KOLASCH &amp; BIRCH, LLP

INTELLECTUAL PROPERTY LAW

8110 GATEHOUSE ROAD

SUITE 500 EAST

FALLS CHURCH, VA 22042

USA

(703) 205-8000

FAX: (703) 205-8050

(703) 698-8590 (G IV)

TELEX: 248345

e-mail: mailroom@bskb.com

TERRELL C. BIRCH  
 RAYMOND C. STEWART  
 JOSEPH A. KOLASCH  
 ANTHONY L. BIRCH  
 JAMES M. SLATTERY  
 BERNARD L. SWEENEY\*  
 MICHAEL K. MUTTER  
 CHARLES GORENSTEIN  
 GERALD M. MURPHY, JR.  
 LEONARD R. SVENSSON  
 TERRY L. CLARK  
 ANDREW D. MEIKLE  
 MARC S. WEINER  
 JOE MCKINNEY MUNCY  
 ANDREW F. REISH  
 ROBERT J. KENNEY  
 C. JOSEPH FARACI  
 DONALD J. DALEY

OF COUNSEL:  
 HERBERT M. BIRCH (1905-1996)  
 WILLIAM L. GATES\*  
 ELLIOT A. GOLDBERG\*  
 EDWARD H. VALANCE  
 RUPERT J. BRADY\*

\*ADMITTED TO A BAR OTHER THAN VA.

SENIOR COUNSEL:  
 PAUL M. CRAIG, JR.\*

JOHN W. BAILEY  
 JOHN A. CASTELLANO, III  
 MARK R. BUSCHER  
 GARY D. YACURA  
 SUSAN S. MORSE  
 THOMAS S. AUCHTERLONIE  
 EDWARD H. SIKORSKI  
 MICHAEL R. CAMMARATA  
 JAMES T. ELLER, JR.

REG. PATENT AGENTS:  
 FREDERICK R. HANDREN  
 ANDREW J. TELESZ, JR.  
 MARK J. NUEL, PH.D.  
 MARYANNE LIOTTA, PH.D.

Date: April 30, 1997Docket No.: 1259-0191P-SP

Assistant Commissioner for Patents  
 Box PATENT APPLICATION  
 Washington, D.C. 20231

Sir:

Transmitted herewith for filing is the patent application of

Inventor(s): HATAKEYAMA, Kouki

For: CONTROLLING METHOD FOR ELECTRONIC STILL CAMERA

Enclosed are:

X A specification consisting of 16 pagesX 3 sheet(s) of formal drawingsX An assignment of the invention     Certified copy of Priority Document(s)X Executed Declaration X Original      Photocopy     A verified statement to establish small entity status under 37 CFR 1.9 and 37 CFR 1.27     Preliminary Amendment     Information Disclosure Statement, PTO-1449 and reference(s)     Other \_\_\_\_\_

The filing fee has been calculated as shown below:

LARGE ENTITY				SMALL ENTITY			
FOR	NO. FILED	NO. EXTRA	RATE FEE		RATE FEE		
BASIC FEE	***** ***** *****	***** ***** *****	***** ***** \$770.00 *****	or	**** **** \$385.00 ****		
TOTAL CLAIMS	6 - 20 =	0	x22 =\$ 0.00	or	x 11 = \$	0.00	
INDEPENDENT	2 - 3 =	0	x80 =\$ 0.00	or	x 40 = \$	0.00	
MULTIPLE DEPENDENT CLAIM PRESENTED <u>no</u>			+260 = \$ 0.00	or	+130 = \$	0.00	
TOTAL \$ 770.00				TOTAL \$ 0.00			

X A check in the amount of \$ 810.00 to cover the filing fee and recording fee (if applicable) is enclosed.

— Please charge Deposit Account No. 02-2448 in the amount of \$ \_\_\_\_\_. A triplicate copy of this transmittal form is enclosed.

X If necessary, the Commissioner is hereby authorized to charge payment of the following fees associated with this communication or credit any overpayment to Deposit Account No. 02-2448.

X Any additional filing fees required under 37 CFR 1.16.

X Any patent application processing fees under 37 CFR 1.17.

Respectfully submitted,

BIRCH, STEWART, KOLASCH & BIRCH, LLP

By MICHAEL K. MUTTER

Reg. No. 29,680

P. O. Box 747

Falls Church, Virginia 22040-0747

# CONTROLLING METHOD FOR ELECTRONIC STILL CAMERA

## BACKGROUND OF THE INVENTION

### 1. Field of the Invention

The present invention relates to a controlling method for an electronic still camera which picks up image signal through a solid state imaging device such as a CCD (charge coupled device) image sensor, and records still pictures on a signal recording medium such as a card memory or a magnetic disc. More particularly, the present invention relates to a recording control method for an electronic still camera with an electronic view finder for displaying a moving picture of a photographic subject.

### 2. Background Arts

Electronic still cameras have been known, wherein a solid state imaging device photo-electrically converts an optical image into electric image signals, and the image signals are recorded as a still picture on a signal recording medium. The recorded image signal is read to display the still picture on a screen such as an LCD (liquid crystal display) or a CRT (cathod ray tube). Some still cameras adopt an optical view finder. But providing an optical view finder raises the cost of the still camera. In addition, the optical view finder is incapable of forming a clear image of a low brightness subject. Therefore, many still cameras adopt an electronic view finder to display a moving picture of a photoraphic subject on a small LCD or a small CRT on the basis of image signals picked up through the same solid state imaging device that is used for recording, as disclosed for example in JPA 4-348685.

A solid state imaging device has a matrix of photo-electric sensor cells or pixels on its imaging surface, each pixel is cyclically charged with a photo-electric signal of an amount corresponding to received light quantity, and the charge stored in the pixel is read as an image signal. In front of the  
5 pixels, there are blue, green and red filters, so each pixel receives one of three color light. The charges are transferred in serial to a signal processor, to be processed as three color image signals.

For the electronic view finder, image signals obtained through the solid state imaging device are transformed into an appropriate form for  
10 displaying a moving picture on the LCD or CRT. For example, to obtain field image signals according to the NTSC system, the solid state imaging device is driven at intervals of 1/60 seconds corresponding to the field frequency 60 Hz of the NTSC system, to sample signal charges of the pixels in accordance with the interlace-scanning method. By interlacing a field with a next field,  
15 a frame is displayed every 1/30 seconds on the LCD of the electronic view finder or on the CRT. Thus, a moving picture of a subject that the still camera is photographing is displayed on the electronic view finder in a real time fashion. Besides the function of framing, the electronic view finder allows to monitor the recorded still picture on the instant based on the image signals  
20 read from the signal recording medium.

As a method of interlacing the pixels of the solid state imaging device, recent video cameras adopt a charge transfer method, hereinafter referred to as pixel combination. According the pixel combination method, an image signal of one color is obtained as a sum of signal charges of two  
25 adjacent pixels which receive the same color. Specifically, image signals for a first or odd field are obtained by adding the signal charge of each of those pixels aligned in even horizontal scanning lines of the CCD image sensor to

the signal charge of one of those pixels detecting the same color in one of two adjacent odd horizontal scanning lines. Thereafter, to provide image signals for a second or even field, the signal charge of each pixel of the even horizontal scanning lines is added to the signal charge of one of those pixels  
5 detecting the same color in the other of the two adjacent odd horizontal scanning lines.

The field image signals for the first and second fields are respectively processed for white balance correction and  $\gamma$ -correction in a conventional manner, and are interlaced with each other to display a frame of  
10 the moving picture on the electronic view finder. On the basis of the field image signals obtained in this way, the moving picture can also be displayed on an external monitor such as an external CRT with no problem. The pixel combination method is useful for reducing the influence of noise on a moving picture displayed on the electronic view finder or the external monitor in a real  
15 time fashion based on the NTSC system.

On the other hand, when recording a still picture on the signal recording medium, it is desirable to read the signal charges of the individual pixels without combining or adding them, and record the image signals in the form of digital image data for each pixel, because the recorded image data of  
20 the still picture is expected to be processed for each pixel, e.g. in a personal computer to print or merge-print the still picture as a hard copy. Therefore, pixel-combined field image signals as above are inappropriate for recording. For this reason, the reading format of the solid state imaging device is switched over between when to pick up field image signals for displaying a  
25 moving picture, hereinafter called "a movie mode", and when to pick up image signals for recording a still picture, hereinafter called "a recording mode". In the recording mode, the still camera with the electronic view finder scans the

individual pixels sequentially, and record image signal for each pixel in the signal recording medium.

As a result, under the same exposure condition, the signal levels of the image signals for the still picture drops from those of the pixel-combined field image signals as being obtained by adding the signal charges of every two pixels. In the movie mode, white balance and exposure amount, e.g. charge storage time of the solid state imaging device, are automatically controlled depending upon the signal levels of the pixel-combined image signals. If the same white balance and the same exposure value as used for the movie mode are applied to the recording mode, reproduced still pictures would have improperly low density and insufficient color balance due to the difference in signal level. However, controlling exposure based on the signal levels of image signals obtained from the individual pixels in the recording mode, i.e. after each shutter release, results a longer time lag from the shutter release to the actual recording, so that the recorded still picture will be shifted in time from a desired one. This is apparently undesirable.

## SUMMARY OF THE INVENTION

In view of the foregoing, a primary object of the present invention is to provide a controlling method for a still camera with an electronic view finder, whereby a still picture is recorded at an appropriate signal level on a recording medium in the recording mode as soon as the shutter is released, whereas a moving picture of the photographic subject is displayed in a real time fashion in the movie mode.

To achieve the above object, according to the present invention, when the still camera is switched over from the movie mode to the recording mode, the signal level of image signals to record are controlled based on the

signal level of field image signals obtained by the pixel combination in the movie mode. Concretely, the exposure value, e.g. the aperture size of a photographic lens or the charge storage time of the solid state imaging device, or the gain of an amplifier at the output of the solid state imaging device is  
5 determined depending upon the signal level of the field image signals.

According to a preferred embodiment of the present invention, the charge storage time is doubled in the recording mode compared with the latest charge storage time used in the preceding movie mode. With the doubled exposure amount, the signal levels of the recording image signals can simply  
10 be set in the same and proper range as the field image signals. That is, the luminance and color balance of the recorded still picture can be set in the substantially same range as the moving picture displayed on the view finder.

#### BRIEF DESCRIPTION OF THE DRAWINGS

15 The above and other objects and advantages of the present invention will become apparent from the following detailed description of the preferred embodiments when read in connection with the accompanying drawings, which are given by way of illustration only and thus are not limitative of the present invention, wherein like reference numerals designate like or  
20 corresponding parts throughout the several views, and wherein:

Figure 1 shows a block diagram of an electronic still camera according to an embodiment of the present invention;

Figure 2 shows timing charts illustrating the operation of the still camera of FIG. 1;

25 Figure 3 shows a flow chart illustrating the operation sequence of the still camera of FIG. 1; and

Figure 4 shows an imaging surface of a conventional CCD image sensor used in the still camera.

#### DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENT

5 In a still camera shown in FIG. 1, a CCD image sensor 2 is disposed behind a photographic lens 5, and is driven through a CCD driver 6. As shown in FIG. 2, the CCD image sensor 2 has a matrix of sensor cells or pixels 3 on its imaging surface, each pixel 3 accumulates an electric charge in a cycle determined by the CCD driver 6. In front of the pixels 3, there are blue, green and red filters 4B, 4G and 4R, so each pixel 3 receives one of three color light that passes through the corresponding one of the three color filters 4B, 4G and 4R.

The signal charges are transferred in serial to a color separation circuit 7, to be separated into blue, green and red image signals B, G and R.

15 The three color separated image signals are amplified in an amplifier 8 with individual gains determined according to color in a way as set forth later. The amplified image signals are sent to a white balance circuit 9, which adjusts the signal levels of the blue image signal and the red image signal to the signal level of the green image signal such that the ratio of blue to green and the ratio

20 of red to green are maintained unchanged. The white balance circuit 9 is for eliminating the influence of color temperature of illumination light on the photography.

The image signals from the white balance circuit 9 are sent via a switch circuit 11 to an integration circuit 12. A system controller 10 sends

25 horizontal synchronizing signals HSYNC to the CCD driver 6 for driving the CCD image sensor 2, and also to the switch circuit 11. The switch circuit 11 operates synchronously with the horizontal synchronizing signals HSYNC, to



send the image signals sequentially and color by color to the integration circuit 12. The integration circuit 12 integrates the image signals by each color in each field interval. The integrated value of each color is fed to the system controller 10.

5           The system controller 10 controls the white balance circuit 9 to keep the signal levels of the blue image signal and the red image signal in constant ratios to the signal level of the green image signal. The system controller 10 also controls the charge storage time or exposure time of the CCD image sensor 2 to adjust the level of luminance signal in a proper range. The  
10   luminance signal is obtained by weighting and adding the integrated values of the three color image signals from the integration circuit 12. Data of the exposure time determined by the system controller 10 is stored in a memory 13 along with data of the amplifier gains for three colors and white balance control data.

15           The image signals from the white balance circuit 9 are subjected to a gradation correction in a  $\gamma$ -corrector 14 and are, thereafter, sent to a multiplexor 15. The multiplexor 15 converts the color separated image signals back into a serial signal, and an A/D converter 16 converts the serial signal into a digital signal. A signal processing circuit 20 transforms the digital  
20   signal according to the operation mode of the still camera, as will be described in detail below. In a movie mode, the image signals are sent to a display circuit 22, so that a moving picture is displayed on an LCD monitor 23 in a real time fashion. In a recording mode, the signal processing circuit 20 sends the image signal to a writing circuit 24 so that the image signals are stored as  
25   digital data in a recording medium 25, e.g. a card memory. A reading circuit 26 is provided for reading the image signals from the recording medium 25, and sending the same to the signal processing circuit 20. A D/A converter 27

is connected to the signal processing circuit 20, to enable outputting the image signals in the form of composite image signal to an external device.

The operation of the still camera will be described with reference to FIGS. 3 to 4.

5 When a not-shown power switch is turned on, the still camera starts operating in the movie mode, wherein the system controller 10 drives the CCD image sensor 2 through the CCD driver 6 on the basis of vertical synchronizing signals VSYNC generated at the frequency of 1/60 seconds. In the movie mode, the CCD image sensor 2 is read according the pixel combination. Since the color filters 4B, 4G and 4R extend vertically in this  
10 embodiment, the pixels 3 in the same column detect the same color. Therefore, the signal charge of each pixel 3 of the even horizontal scanning lines of the CCD image sensor 2 is added to the signal charge of the pixel 3 disposed of the same column in the preceding odd horizontal scanning line, to  
15 provide image signals for a first or odd field. Thereafter, to provide image signals for a second or even field, the signal charge of each pixel 3 of the even horizontal scanning lines is added to the signal charge of the pixel 3 disposed of the same column in the following odd horizontal scanning line.

In the shown CCD image sensor 2, the filters 4B, 4G and 4R are  
20 arranged in stripes extending vertical to the horizontal scanning direction. But it is possible to use a CCD image sensor, wherein three color filters are arranged in a mosaic matrix in correspondence with the matrix arrangement of the pixels 3. In that case, the signal charge of each pixel is added to the signal charge of the nearest one of those pixels 3 which are used for detecting  
25 the same color in the adjacent horizontal scanning lines, to provide field image signals according to the pixel combination.

The image signals of each field are integrated by each color in the integration circuit 12. The system controller 10 calculates a luminance signal by weighting and then adding the integrated values of three colors, to determine whether the level of the luminance signal is proper or not. When  
5 the level is below the proper range, it means that the exposure value is too low. Then, the system controller 10 calculates a longer charge storage time T1 than before, and sends a control signal to the CCD driver 6 so as to drive the CCD image sensor 2 with the elongated charge storage time T1. On the contrary, when the level is above the proper range, the system controller 10 shorten the  
10 charge storage time T1 for the movie mode.

In this way, the exposure amount of the CCD image sensor 2 is automatically controlled to be a proper value. Of course, the charge storage time T1 for the movie mode cannot exceed 1/60 seconds. Therefore, when the exposure amount is insufficient even with the longest exposure time of 1/60  
15 seconds, the system controller 10 raises the amplifier gains for the respective colors to upper values than given values. The latest determined charge storage time T1 and gains of the amplifier 8 are stored in the memory 13. The system controller 10 also monitors the integrated values of the three colors, and sends a control signal to the white balance circuit 9 to maintain the respective ratios  
20 of the integrated values of blue and red to the integrated value of green unchanged.

The image signals from the white balance circuit 9 are sent to the signal processing circuit 20 through the  $\gamma$ -corrector 14, the multiplexor 15 and the A/D converter 16. The signal processing circuit 20 interlaces the image  
25 signals of a first or odd field with those of a second or even field. That is, the signal processing circuit 20 sends the image signals of the odd fields and those of the even fields alternately to the display circuit 22. In result, a moving

picture of the photographic subject is displayed in a real time fashion on the LCD 23 based on the pixel-combined image signals according to the interlace-scanning of NTSC system.

Responsive to a shutter release operation, the still camera starts  
5 operating in the recording mode. Specifically, as soon as the shutter is released, the system controller 10 determines a charge storage time T2 for the recording mode by doubling the charge storage time T1 stored in the memory 13, to assign the charge storage time T2 to the CCD driver 6. In result, the CCD image sensor 2 stores signal charges in the charge storage time T2 that  
10 is twice as long as the latest charge storage time T1 used for the preceding movie mode, wherein the charge storage time T2 for the recording mode is not more than 1/30 seconds as the charge storage time T1 for the movie mode is not more than 1/60 seconds.

In the recording mode, the signal charges of the individual pixels 3  
15 are picked up sequentially from every horizontal scanning lines, without being pixel-combined, i.e. without adding the values of two adjacent pixels 3. Accordingly, the charge storage time T2 twice the latest charge storage time T1 provides image signals with proper signal levels in view of luminance and white balance as well.

20 Instead of doubling the charge storage time, the same effect results from doubling the gains of the amplifier 8 in the recording mode. It is alternatively possible to determine an aperture size for the recording mode, that is  $\sqrt{2}$  as large as that used for the preceding movie mode when the photographic lens 5 has an iris diaphragm.

25 In this way, image signals for one frame are obtained from the signal charges of the individual pixels 3 of the CCD image sensor 2 with the charge storage time T2, and are sent to the signal processing circuit 20 through the

white balance circuit 9, the  $\gamma$ -corrector 14, the multiplexor 15 and the A/D converter 16. The signal processing circuit 20 sends the image signals of one frame to the writing circuit 24, to write them as a still picture in the recording medium 25. Since the image signals from the individual pixels 3 are recorded,  
5 it is possible to process the image signals in the unit of pixel.

The still camera also has a reproduction mode to display a recorded still picture. The still camera is switched to the reproduction mode in response to a not-shown manually operated mode switch. In the reproduction mode, the image signals of one frame are read from the recording medium 25 through the  
10 reading circuit 26 into the signal processing circuit 20 in a field sequential fashion. The signal processing circuit 20 operates in the same way as in the movie mode, so the image signals are sent to the display circuit 22 while repeatedly interlacing a first field of the frame with a second field. Thus, the recorded still picture is displayed on the LCD 23 according to the NTSC  
15 system. Of course, it is possible to output a composite image signal of the recorded still picture through the D/A converter 27, to display the still picture on an external CRT.

According to the above embodiment, the charge storage time or the amp-gain for the recording mode is increased by a factor of two over the  
20 preceding movie mode. However, it is possible to use another factor appropriate for setting the signal levels of the recording image signals in the same and proper range as the field image signals, i.e. for setting the luminance and color balance of the recorded still picture in the same range as the moving picture displayed on the view finder.

Thus, the present invention should not be limited to the above  
25 described embodiments but, on the contrary, various modification may be

possible to those skilled in the art without departing from the scope of claims attached hereto.

continued on next page

What is claimed is:

1. A method of controlling an electronic still camera having a solid state imaging device with a matrix of pixels, an electronic view finder for  
5 displaying a moving picture of a photographic subject by an interlace-scanning, and a recording device for recording a still picture of the photographic subject as digital data on a recording medium in response to a shutter release operation, the method comprising the steps of:

obtaining field image signals of an odd field by adding a signal  
10 charge stored in each of those pixels aligned in even horizontal scanning lines of the solid state imaging device to a signal charge stored in one of those pixels detecting the same color in one of two adjacent odd horizontal scanning lines;

obtaining field image signals of an even field by adding the signal  
15 charge of each pixel of the even horizontal scanning lines to a signal charge stored in one of those pixels detecting the same color in the other of the two adjacent odd horizontal scanning lines;

displaying a frame of the moving picture based on the field image signals for the odd and even fields;

20 detecting signal levels of the field image signals;

starting, in response to the shutter release operation, to read signal charges stored in the individual pixels of the solid state imaging device by sequential scanning each horizontal scanning line, to provide image signals of one frame to record; and

25 determining depending upon the signal levels of the field image signals, signal levels of the image signals to record.

2. A method according to claim 1, wherein the signal levels of the image signals to record are controlled by changing exposure value or gain of an amplifier connected to an output of the solid state imaging device.

5           3. A method according to claim 2, wherein the solid state imaging device is driven with a charge storage time for obtaining the image signals to record, the charge storage time being twice as long as a charge storage time that is used for the field image signals immediately before the shutter release operation.

10

4. A method according to claim 2, wherein the gain of the amplifier for each color is doubled for the image signals to record, compared with that used for the field image signals immediately before the shutter release operation.

15

5. A method of controlling an electronic still camera having a solid state imaging device with a matrix of pixels and three-color separation filters, an electronic view finder for displaying a moving picture of a photographic subject, and a recording device for recording a still picture of the photographic  
20 subject as digital data on a recording medium in response to a shutter release operation, the method comprising the steps of:

driving the solid state imaging device at a first interval corresponding to a predetermined field frequency of an interlace-scanning used for displaying the moving picture;

25

determining a first charge storage time of the solid state imaging device in a range not more than the first interval;



obtaining field image signals for an odd field by adding a signal charge stored during the first charge storage time in each of those pixels aligned in even horizontal scanning lines of the solid state imaging device to a signal charge stored during the first charge storage time in one of those  
5 pixels used for detecting the same color in one of two adjacent odd horizontal scanning lines;

obtaining field image signals for an even field by adding the signal charge of each pixel of the even horizontal scanning lines to a signal charge stored during the first charge storage time in one of those pixels used for  
10 detecting the same color in the other of the two adjacent odd horizontal scanning lines;

displaying a frame of the moving picture based on the field image signals for the odd and even fields by the interlace-scanning;

detecting signal levels of the field image signals;

15 revising the first charge storage time in accordance with the detected signal levels;

determining, in response to the shutter release operation, a second charge storage time based on the first charge storage time;

obtaining image signals for one frame from signal charges stored  
20 during the second charge storage time in the individual pixels of the solid state imaging device by sequential scanning each horizontal scanning line; and

recording the image signals of one frame as a still picture in the recording medium.

25 6. A method according to claim 5, wherein the second charge storage time is twice as long as the first charge storage time.

## ABSTRACT OF THE DISCLOSURE

An electronic still camera according to the invention pick up field image signals from a CCD image sensor by adding signal charges of two adjacent pixels, and displays based on the field image signals a moving picture on an LCD according to an interlace-scanning. In response to a shutter release operation, the still camera doubles the charge storage time of the CCD image sensor, and sequentially picks up signal charges from every pixel of the CCD image sensor to record as image signals of one frame, so the recorded image signals have the same signal levels as the field image signals.



FIG. 2

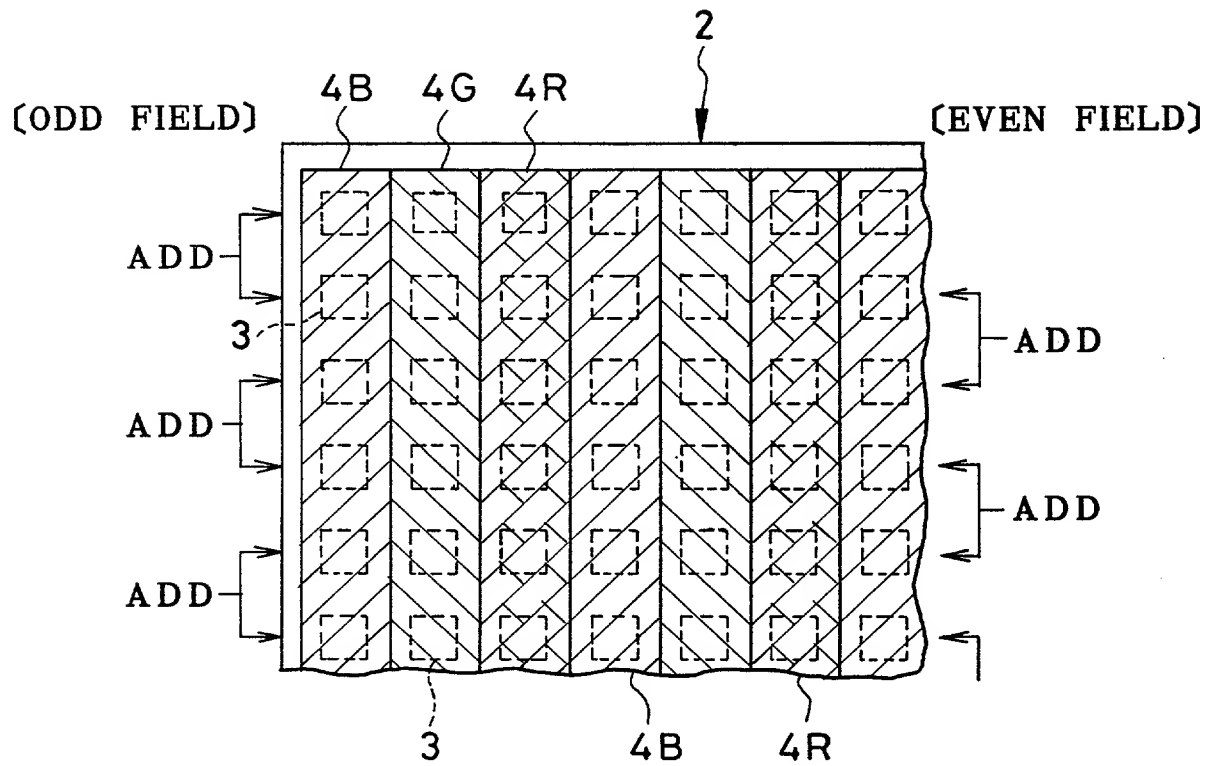


FIG. 3


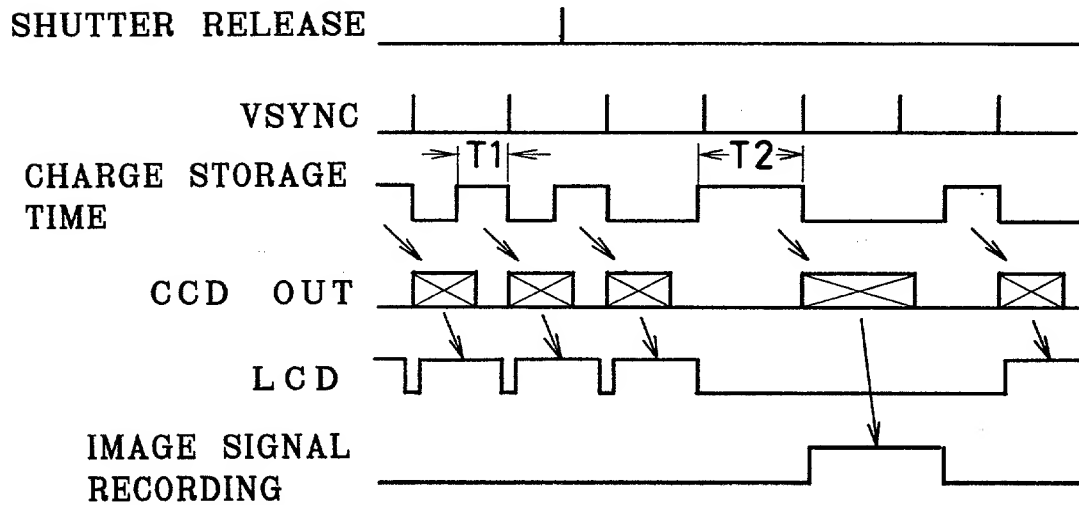


FIG. 4

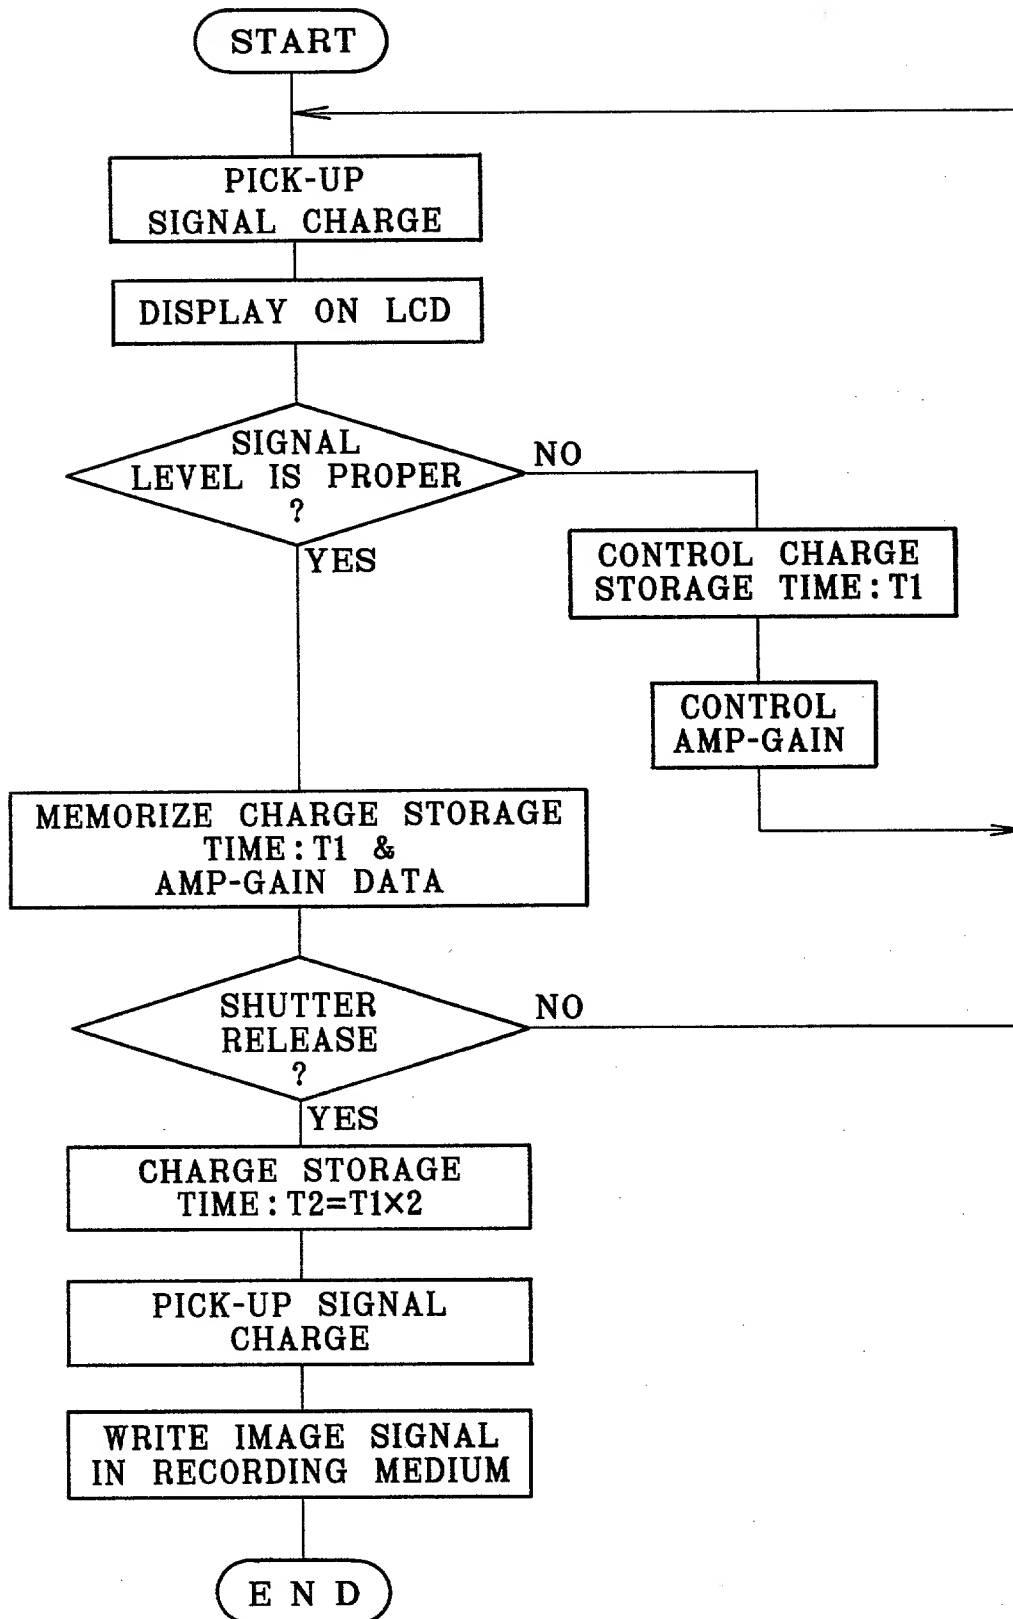

COMBINED DECLARATION AND POWER OF ATTORNEY  
FOR PATENT AND DESIGN APPLICATIONS

ATTORNEY DOCKET NO.

1259-SP191P

PLEASE NOTE:  
YOU MUST  
COMPLETE THE  
FOLLOWING:

Insert Title

Check Box If  
Appropriate —  
For Use Without  
Specification  
Attached

As a below named inventor, I hereby declare that: my residence post office address and citizenship are as stated next to my name; that I verily believe that I am the original, first and sole inventor (if only one inventor is named below) or a joint inventor (if plural inventors are named below) of the subject matter which is claimed and for which a patent is sought on the invention entitled: \*

Controlling Method For Electronic Still Camera

the specification of which is attached hereto unless one of the following boxes is checked:

- ☐ The Specification was filed on \_\_\_\_\_ and was assigned  
Serial No. \_\_\_\_\_ and was amended on \_\_\_\_\_  
☐ was filed as PCT international application number \_\_\_\_\_ on  
\_\_\_\_\_ and was amended under PCT Article 19 on \_\_\_\_\_  
(if applicable).

I hereby state that I have reviewed and understand the contents of the above identified specification, including the claims, as amended by any amendment referred to above.

I acknowledge the duty to disclose information material to patentability as defined in Title 37, Code of Federal Regulations, §1.56.

I do not know and do not believe the same was ever known or used in the United States of America before my or our invention thereof, or patented or described in any printed publication in any country before my or our invention thereof, or more than one year prior to this application, that the same was not in public use or on sale in the United States of America more than one year prior to this application, that the invention has not been patented or made the subject of an inventor's certificate issued before the date of this application in any country foreign to the United States of America on an application filed by me or my legal representatives or assigns more than twelve months (six months for designs) prior to this application, and that no application for patent or inventor's certificate on this invention has been filed in any country foreign to the United States of America prior to this application by me or my legal representatives or assigns, except as follows:

I hereby claim foreign priority benefits under Title 35, United States Code, §119 of any foreign application(s) for patent or inventor's certificate listed below:

Prior Foreign Application(s)	Priority	Claimed
8-113906 (Number)	Japan (Country)	5/8/96 (Month/Day/Year Filed)
_____ (Number)	_____ (Country)	_____ (Month/Day/Year Filed)
_____ (Number)	_____ (Country)	_____ (Month/Day/Year Filed)
_____ (Number)	_____ (Country)	_____ (Month/Day/Year Filed)
_____ (Number)	_____ (Country)	_____ (Month/Day/Year Filed)

All Foreign Applications, if any, for any Patent or Inventor's Certificate Filed More Than 12 Months (6 Months for Designs) Prior To The Filing Date of This Application:

Country	Application No.	Date of Filing (Month/Day/Year)
_____	_____	_____
_____	_____	_____

I hereby claim the benefit under Title 35, United States Code, §120 of any United States application(s) listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States application in the manner provided by the first paragraph of Title 35, United States Code, §112, I acknowledge the duty to disclose material information as defined in Title 37, Code of Federal Regulations, §1.56 which occurred between the filing date of the prior application and the national or PCT international filing date of this application:

(Application Serial No.)	(Filing Date)	(Status — patented, pending, abandoned)
_____	_____	_____
(Application Serial No.)	(Filing Date)	(Status — patented, pending, abandoned)
_____	_____	_____

I hereby appoint the following attorneys to prosecute this application and/or an international application based on this application and to transact all business in the Patent and Trademark Office connected therewith and in connection with the resulting patent based on instructions received from the entity who first sent the application papers to the attorneys identified below, unless the inventor(s) or assignee provides said attorneys with a written notice to the contrary:

RAYMOND C. STEWART (Reg. No. 21,066)  
JOSEPH A. KOLASCH (Reg. No. 22,463)  
JAMES M. SLATTERY (Reg. No. 28,380)

CHARLES GORENSTEIN (Reg. No. 29,271)  
LEONARD R. SVENSSON (Reg. No. 30,330)  
MARC S. WEINER (Reg. No. 32,181)

TERRELL C. BIRCH (Reg. No. 19,382)  
ANTHONY L. BIRCH (Reg. No. 26,122)  
BERNARD L. SWEENEY (Reg. No. 24,448)  
MICHAEL K. MUTTER (Reg. No. 29,680)  
GERALD M. MURPHY, JR. (Reg. No. 28,977)  
TERRY L. CLARK (Reg. No. 32,644)  
ANDREW D. MEIKLE (Reg. No. 32,868)

PLEASE NOTE:  
YOU MUST  
COMPLETE THE  
FOLLOWING:

Send Correspondence to: **BIRCH, STEWART, KOLASCH AND BIRCH**

**P.O. Box 747**

**Falls Church, Virginia 22040-0747**

**Telephone: (703) 205-8000**

**Facsimile: (703) 205-8050**

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

Full Name of First or Sole Inventor: Insert Name of Inventor Insert Date This Document Is Signed Insert Residence Insert Citizenship Insert Post Office Address	GIVEN NAME	FAMILY NAME	INVENTOR'S SIGNATURE	*DATE
	Kouki HATAKEYAMA		Kouki Hatakeyama	Apr. 21, 97
	RESIDENCE (City, State & Country)		CITIZENSHIP	
	Saitama, Japan		Japanese	
POST OFFICE ADDRESS (Complete Street Address including City, State & Country)				
c/o Fuji Photo Film Co., Ltd. 3-13-45 Senzui, Asaka-shi, Saitama, Japan				
Full Name of Second Inventor, if any: see above	GIVEN NAME	FAMILY NAME	INVENTOR'S SIGNATURE	*DATE
	RESIDENCE (City, State & Country)		CITIZENSHIP	
	POST OFFICE ADDRESS (Complete Street Address including City, State & Country)			
Full Name of Third Inventor, if any: see above	GIVEN NAME	FAMILY NAME	INVENTOR'S SIGNATURE	*DATE
	RESIDENCE (City, State & Country)		CITIZENSHIP	
	POST OFFICE ADDRESS (Complete Street Address including City, State & Country)			
Full Name of Fourth Inventor, if any: see above	GIVEN NAME	FAMILY NAME	INVENTOR'S SIGNATURE	*DATE
	RESIDENCE (City, State & Country)		CITIZENSHIP	
	POST OFFICE ADDRESS (Complete Street Address including City, State & Country)			
Full Name of Fifth Inventor, if any: see above	GIVEN NAME	FAMILY NAME	INVENTOR'S SIGNATURE	*DATE
	RESIDENCE (City, State & Country)		CITIZENSHIP	
	POST OFFICE ADDRESS (Complete Street Address including City, State & Country)			

\*Note: Must be completed — date this document is signed.